

V6

SOFT-CLOSING CONCEALED FULL EXTENSION SLIDE
三节隐藏式缓冲滑轨系列



V6三节隐藏式缓冲滑轨完美的高度和侧面稳定性，带抗阻的滑轨保证了最佳的滑行功能，自动排除脏物功能，无需维护。应用广泛，为每一套家具提供完美的解决方案。



V6 Soft-closing concealed full extension slide, Perfect height and stability at side can guarantee excellent running condition of the slides, wide range of applications, for each set of furniture, cabinets, there is a suitable solution.

V6F1 SOFT-CLOSING CONCEALED FULL EXTENSION SLIDE
三节隐藏式缓冲滑轨




- 载重: 25kg
- 完美的高度和侧面稳定性, 带抗阻的滑轨保证了最佳的滑行功能
- 滑轨自动排除脏物功能, 无需维护
- 轻柔顺畅, 自动回位
- 推入式安装; 只要把抽屉放在滑轨上, 往里推, 安装即完成
- 有高度调节功能, 可通过转动蓝色轮子调节导轨和抽屉底部的间隙
- 无需工具, 抽屉可快速安装和拆卸
- 有缓冲功能
- Dynamic load capacity: 25kg
- Perfect height and stability at side can guarantee excellent running condition of the slides
- Soft-closing function make the drawer close safely without effect of weight
- Push type installation, Put drawer on slides horizontally, push it closed, then assembling is finished
- With height-adjustment function, the gap between drawer bottom and slides can be adjusted by rotating the blue plastic wheel
- Tool-free, quick installation
- With soft close function

柜体滑轨安装孔尺寸 Hole pattern

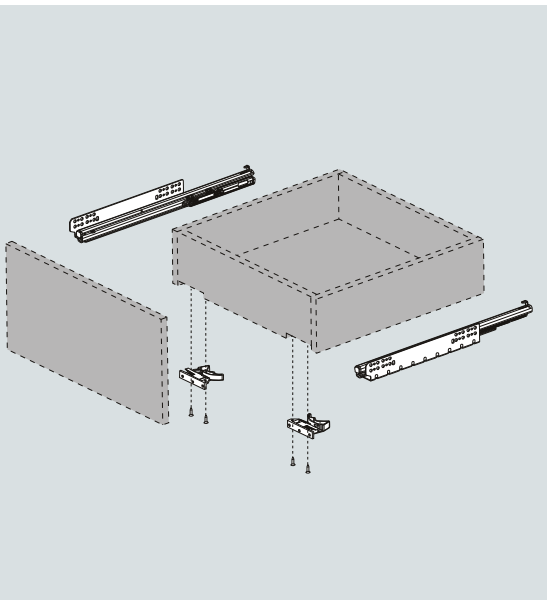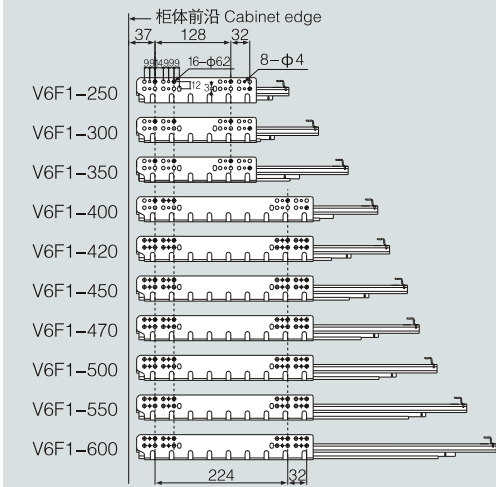


产品型号 Item No.	标称长度NL (mm) Nominal length	拉出长度 (mm) Travel length	最小柜深LT (mm) (外抽 / 内抽) Min cabinet depth (Standard / Inner)	包装 (套/箱) Packing (Set/Box)
V6F1-250	250	234	265 / 265+X	10
V6F1-300	300	284	315 / 315+X	10
V6F1-350	350	334	365 / 365+X	10
V6F1-400	400	384	415 / 415+X	10
V6F1-420	420	404	435 / 435+X	10
V6F1-450	450	434	465 / 465+X	10
V6F1-470	470	454	485 / 485+X	10
V6F1-500	500	484	515 / 515+X	10
V6F1-550	550	534	565 / 565+X	10
V6F1-600	600	584	615 / 615+X	10




柜体所需空间 Space required

Min.: 最小尺寸




抽屉安装图 Drawer installation

SKW: 抽屉净宽 Drawer width
LW: 柜体净宽 Inside net width
Max.: 最大尺寸

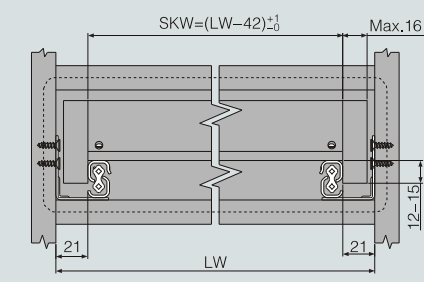


外置抽屉 Standard drawer

NL: 标称长度 Nominal length
SKL: 抽屉长度 Length of drawer
LT: 最小柜深 Min cabinet depth

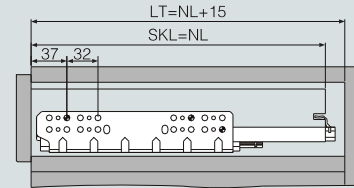


内置抽屉 Inner drawer

NL: 标称长度 Nominal length
SKL: 抽屉长度 Length of drawer
LT: 最小柜深 Min cabinet depth
X: 面板厚度 Thickness of the front panel

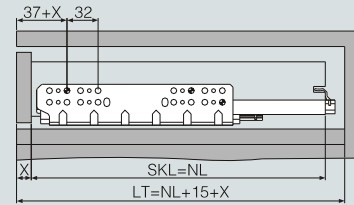


抽屉后板开槽钻孔尺寸 Hole size on rear panel of the drawer

Min.: 最小尺寸

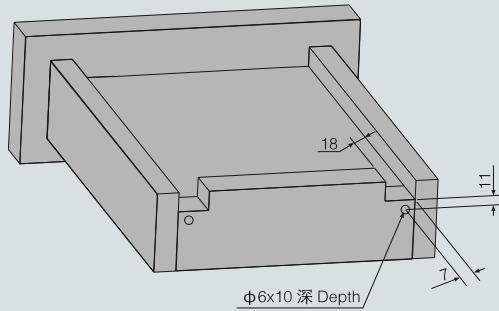


分离器安装 Installation of the locking device

Min.: 最小尺寸

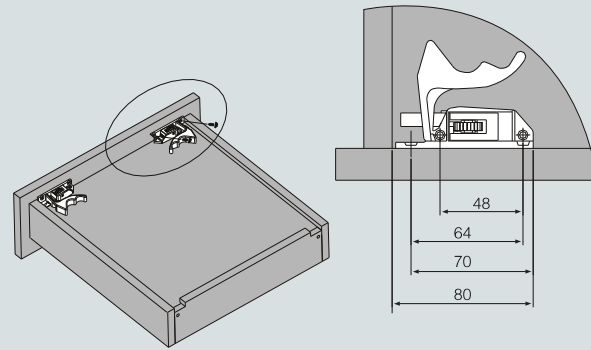


抽屉安装 Installation of the drawer

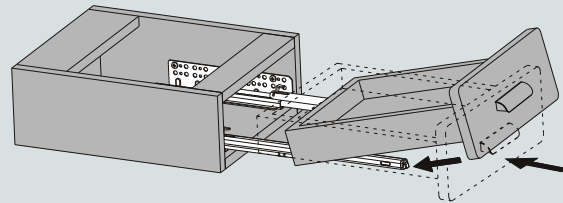


将滑轨全拉出, 把抽屉放置于滑轨上, 水平推入柜体, 抽屉即可安装完毕。
Fully open the slides and put the drawer on it, then push into cabinet horizontally, the drawer can be installed.

抽屉调节与拆卸 Adjustment and removal of the drawer

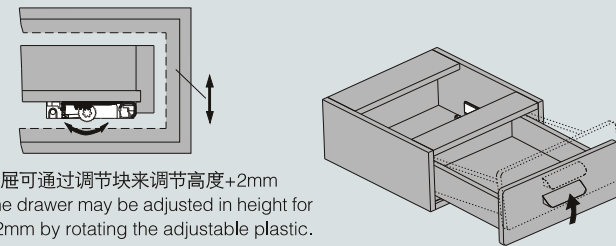

抽屉可通过调节块来调节高度+2mm
The drawer may be adjusted in height for +2mm by rotating the adjustable plastic.

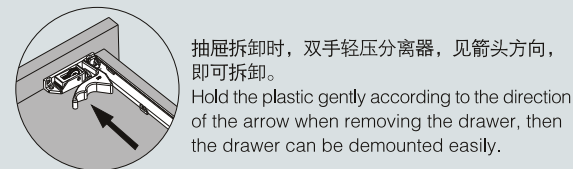

抽屉拆卸时, 双手轻压分离器, 见箭头方向, 即可拆卸。
Hold the plastic gently according to the direction of the arrow when removing the drawer, then the drawer can be demounted easily.